Beiwak®



Beiwak®

12V Electric Winch 3000 LBS

With Handle Switch




1100W	**5mm × 6m**	**1360KG**	**153:1**	**IP65**
Powerful Motor	Steel Cable	Max Pull	Gear Ratio	Waterproof

SPECIFICATIONS

Rated Line Pull	3000 LBS / 1360 KG
Motor	12V DC
Power	1100W
Gear Ratio	153:1
Steel Cable	Ø5mm × 6m
No-load Speed	6 m/min (Single line)
Full-load Speed	3 m/min (Single line)
Drum Size	Ø37mm × 72mm
Bolt Pattern	63mm × 114mm
Mounting Hole	Ø6.5 mm
Net Weight	7.2 kg / 15.87 lbs
Total Weight	8.2 kg / 18.08 lbs
Remote Control	Handle Switch
Cable Length	2.0 m
Operating Temp.	-20°C ~ +60°C

DIMENSIONS (mm)





HANDLE SWITCH



CABLE HOOK




PERFORMANCE (Single line)

Line Pull (LBS)	Line Pull (KG)	Line Speed (m/min)	Motor Current (A)
0	0	6.0	12
1000	454	4.5	32
2000	907	3.5	60
3000	1360	3.0	90

⚠ Use only for horizontal pulling. Do not exceed the rated load capacity.

WIRING DIAGRAM

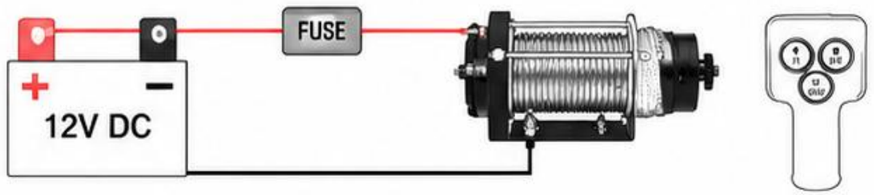

Beiwak®



Beiwak®

12V 3500LBS ELECTRIC WINCH

Powerful Performance • Reliable Quality • Wide Application



SPECIFICATIONS	
Rated Line Pull	3500 lbs / 1587 kg
Motor	12V DC, Permanent Magnet
Power	1200W / 1.6HP
Gear Train	3-Stage Planetary Gear
Gear Ratio	153:1
Clutch	Manual Sliding Ring Gear
Braking Action	Automatic in the Drum
Wire Rope	Φ5mm × 8m (3/16" × 26.2 ft)
Drum Size	Φ1.5" × 2.75" (Φ38mm × 70mm)
Mounting Bolt Pattern	3.00" × 1.10" (76mm × 28mm)
Overall Dimensions	12.44" × 4.21" × 4.53" (316 × 107 × 115 mm)
Net Weight	20.9 lbs / 9.5 kg

PERFORMANCE (FIRST LAYER)


Line Pull (lbs/kg)	Line Speed (ft/min)	Motor Current (A)
0	17.0	20
1000 / 454	11.5	45
2000 / 907	8.3	75
3500 / 1587	6.0	95

PACKAGE INCLUDES

- 1 × Electric Winch
- 1 × Handheld Remote Control
- 1 × Wireless Remote Control
- 1 × Control Box
- 1 × Hook
- 1 × Mounting Bracket
- 1 × Mounting Hardware Set
- 1 × User Manual



DIMENSIONS

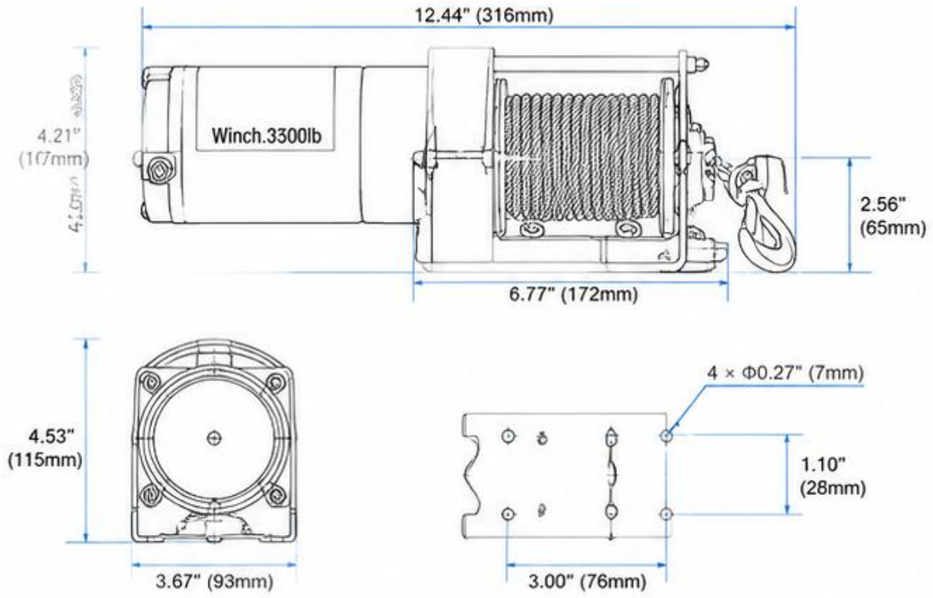

POWERFUL
1200W High Power
Strong Pull

DURABLE
All-metal Construction
Built to Last

RELIABLE
Automatic Brake
Safer Operation

WIDE APPLICATION
ATV, UTV, Trailer, Boat,
Off-road Recovery

Beiwak®



Beiwak®

12V 4000LBS ELECTRIC WINCH

Powerful Performance • Reliable Quality • Wide Application



SPECIFICATIONS	
Rated Line Pull	4000 lbs / 1814 kg
Motor	12V DC, Permanent Magnet
Power	1300W / 1.74HP
Gear Train	3-Stage Planetary Gear
Gear Ratio	153:1
Clutch	Manual Sliding Ring Gear
Braking Action	Automatic in the Drum
Wire Rope	Φ5mm × 8m (3/16" × 26.2 ft)
Drum Size	Φ1.5" × 2.75" (Φ38mm × 70mm)
Mounting Bolt Pattern	3.00" × 1.10" (76mm × 28mm)
Overall Dimensions	13.46" × 4.53" × 5.35" (342 × 115 × 136 mm)
Net Weight	22.0 lbs / 10.0 kg


PERFORMANCE (FIRST LAYER)		
Line Pull (lbs/kg)	Line Speed (ft/min)	Motor Current (A)
0	17.0	20
1000 / 454	11.5	45
2000 / 907	8.3	75
3000 / 1361	6.5	100
4000 / 1814	6.0	120

PACKAGE INCLUDES

- 1 × Electric Winch
- 1 × Handheld Wired Control
- 1 × Wireless Remote Control
- 1 × Control Box
- 1 × Roller Fairlead
- 1 × Hook
- 1 × Mounting Bracket
- 1 × Mounting Hardware Set
- 1 × User Manual



DIMENSIONS

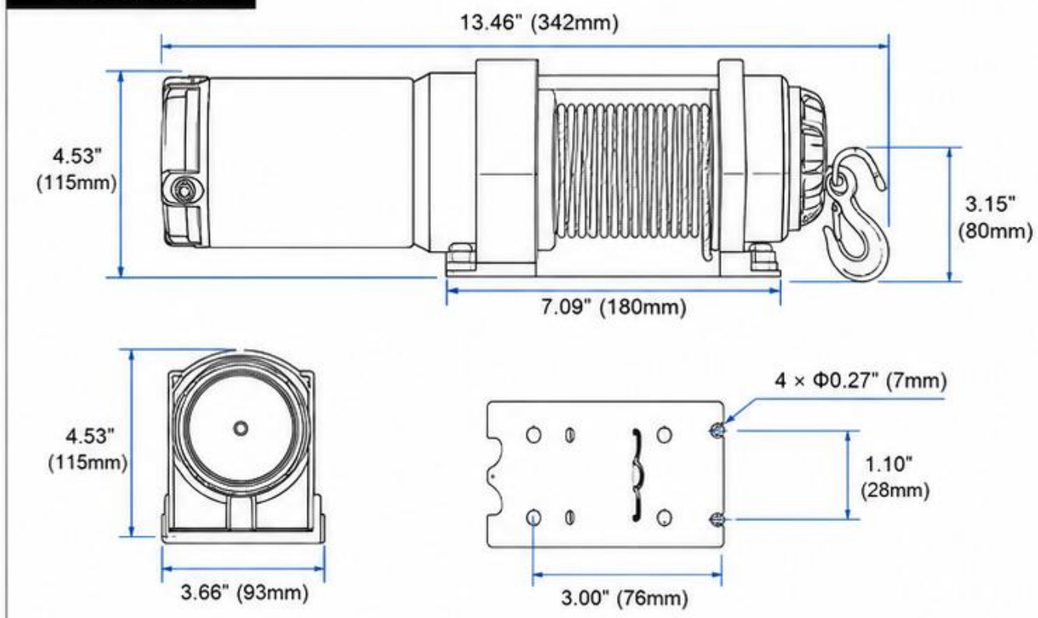

POWERFUL
1300W High Power
Strong Pull

DURABLE
All-metal Construction
Built to Last

RELIABLE
Automatic Brake
Safer Operation

WIDE APPLICATION
ATV, UTV, Trailer, Boat,
Off-road Recovery

Beiwak®


钢丝绳方向
READ OWNER'S MANUAL BEFORE OPERATING
CE
Winch 4500
OUT
IN
WARNING!

Beiwak®

12V 4500LBS ELECTRIC WINCH

POWERFUL PERFORMANCE | RELIABLE QUALITY | WIDE APPLICATION




SPECIFICATIONS	
Rated Line Pull	4500 lbs / 2041 kg
Motor	12V DC, Permanent Magnet
Power	1400W / 1.9HP
Gear Train	3-Stage Planetary Gear
Gear Ratio	153:1
Clutch	Manual Sliding Ring Gear
Braking Action	Automatic in the Drum
Wire Rope	Φ5mm × 10m (3/16" × 32.8 ft)
Drum Size	Φ1.5" × 2.75" (Φ38mm × 70mm)
Mounting Bolt Pattern	3.00" × 1.10" (76mm × 28mm)
Overall Dimensions	13.46" × 4.53" × 5.35" (342 × 115 × 136 mm)
Net Weight	23.1 lbs / 10.5 kg

PERFORMANCE (FIRST LAYER)		
Line Pull (lbs/kg)	Line Speed (ft/min)	Motor Current (A)
0	16.5	20
1000 / 454	11.0	40
2000 / 907	8.0	70
3000 / 1361	6.0	95
4000 / 1814	4.5	115
4500 / 2041	4.0	130

PACKAGE INCLUDES

- 1 × Electric Winch
- 1 × Handheld Wired Control
- 1 × Wireless Remote Control
- 1 × Control Box
- 1 × Roller Fairlead
- 1 × Hook
- 1 × Mounting Bracket
- 1 × Mounting Hardware Set
- 1 × User Manual

DIMENSIONS

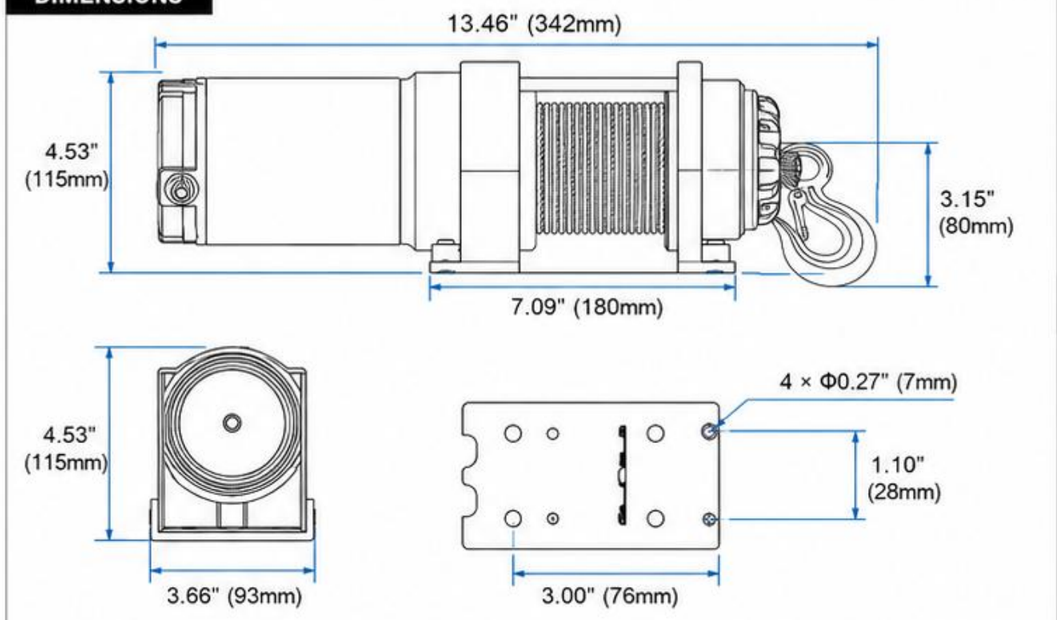

POWERFUL
1400W High Power
Strong Pull

DURABLE
All-metal Construction
Built to Last

RELIABLE
Automatic Brake
Safer Operation

WIDE APPLICATION
ATV, UTV, Trailer, Boat,
Off-road Recovery

Beiwak®


Winch 6000lb
OUT
IN
WARNING!
Please turn off the power switch when not in use

Beiwak®

12V 6000LBS ELECTRIC WINCH

• Powerful Performance • Reliable Quality • Wide Application



SPECIFICATIONS	
Rated Line Pull	6000 lbs / 2721 kg
Motor	12V DC, Permanent Magnet
Power	2000W / 2.68HP
Gear Train	3-Stage Planetary Gear
Gear Ratio	265:1
Clutch	Sliding Ring Gear
Braking Action	Automatic in the Drum
Wire Rope	Φ8mm × 15m (5/16" × 49.2 ft)
Drum Size	Φ2.5" × 5.5" (Φ64mm × 140mm)
Mounting Bolt Pattern	10.00" × 4.50" (254mm × 114mm)
Overall Dimensions	17.64" × 6.10" × 8.27" (448 × 155 × 210 mm)
Net Weight	48.5 lbs / 22.0 kg


PERFORMANCE (FIRST LAVER)		
Line Pull (lbs/kg)	Line Speed (ft/min)	Motor Current (A)
0	16.4	20
1500 / 680	12.8	65
3000 / 1361	9.5	110
4500 / 2041	7.4	155
6000 / 2721	6.0	200

PACKAGE INCLUDES

- 1 × Electric Winch
- 1 × Handheld Wired Control
- 1 × Wireless Remote Control
- 1 × Control Box
- 1 × Hook
- 1 × Mounting Bracket
- 1 × Mounting Hardware Set
- 1 × User Manual



DIMENSIONS

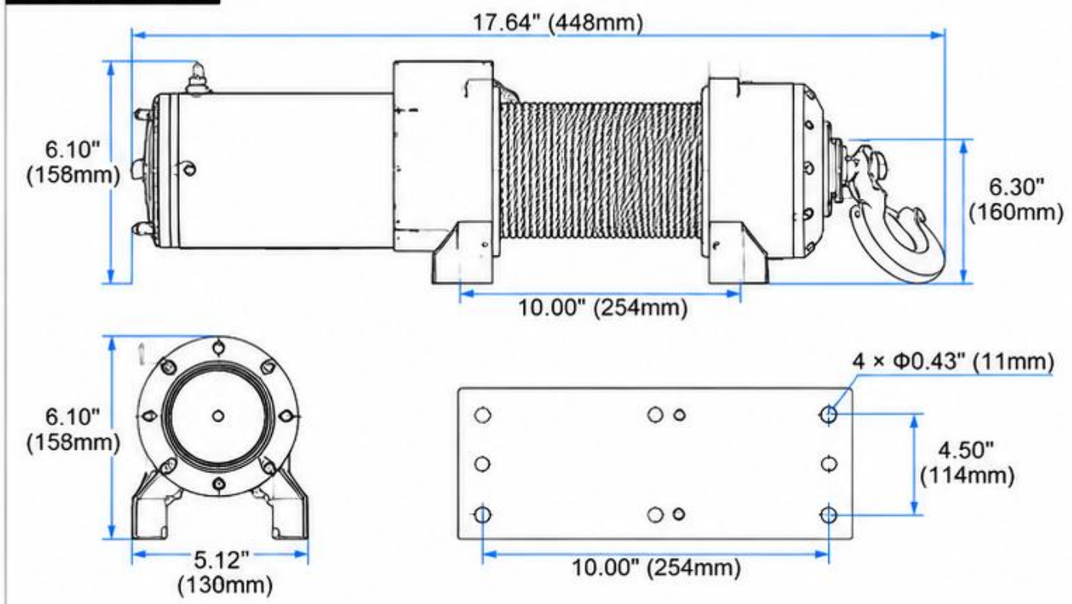

POWERFUL
2000W High Power
Strong Pull

DURABLE
All-metal Construction
Built to Last

RELIABLE
Automatic Brake
Safer Operation

WIDE APPLICATION
ATV, UTV, Trailer, Boat,
Off-road Recovery

Beiwak®


Winch 9500lb
FREE SPOOL
OUT
IN
ON
OFF
Power switch
WARNING!
Please turn off or remove power switch when not in use
FORGED

Beiwak®

12V 9500LBS ELECTRIC WINCH

POWERFUL PERFORMANCE | RELIABLE QUALITY | WIDE APPLICATION



SPECIFICATIONS	
Rated Line Pull	9500 lbs / 4309 kg
Motor	12V DC, Permanent Magnet
Power	3850W / 5.2HP
Gear Train	3-Stage Planetary Gear
Gear Ratio	166:1
Clutch	Manual Sliding Ring Gear
Braking Action	Automatic in the Drum
Wire Rope	Φ8mm × 20m (5/16" × 65.6 ft)
Drum Size	Φ2.5" × 3.15" (Φ63mm × 80mm)
Mounting Bolt Pattern	10.00" × 4.50" (254mm × 114.3mm)
Overall Dimensions	15.63" × 5.91" × 6.89" (397 × 150 × 175 mm)
Net Weight	64.4 lbs / 29.2 kg

PERFORMANCE (FIRST LAYER)


Line Pull (lbs/kg)	Line Speed (ft/min)	Motor Current (A)
0	12.5	25
2000 / 907	8.8	90
4000 / 1814	6.6	150
6000 / 2721	5.2	210
8000 / 3629	4.2	260
9500 / 4309	3.5	320

PACKAGE INCLUDES

- 1 × Electric Winch
- 1 × Handheld Wired Control
- 1 × Wireless Remote Control
- 1 × Control Box
- 1 × Hook
- 1 × Roller Fairlead
- 1 × Mounting Bracket
- 1 × Mounting Hardware Set
- 1 × User Manuul



DIMENSIONS

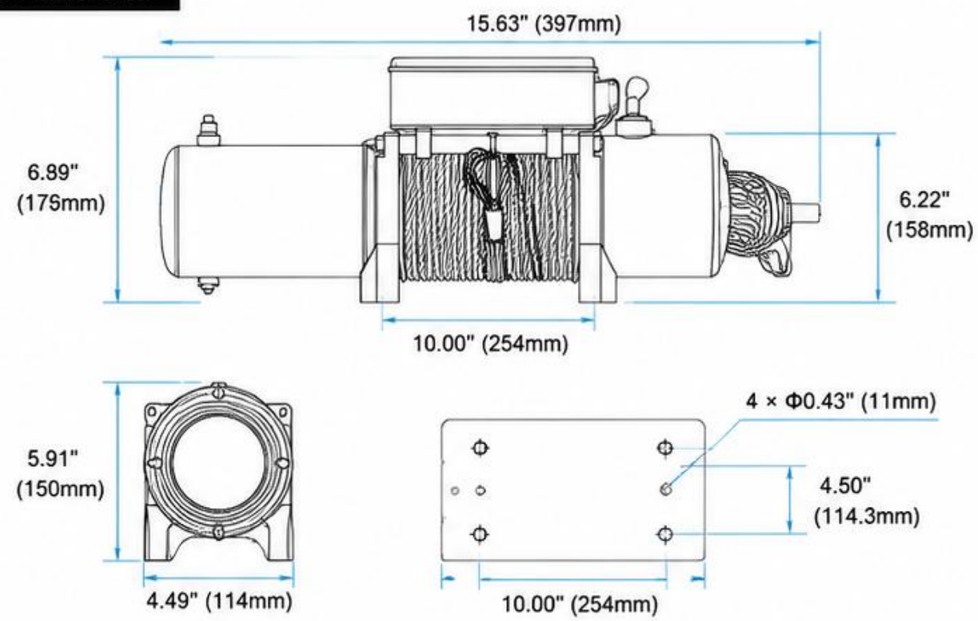

POWERFUL
3850W High Power
Strong Pull

DURABLE
All-metal Construction
Built to Last

RELIABLE
Automatic Brake
Safer Operation

WIDE APPLICATION
ATV, UTV, Trailer, Boat,
Off-road Recovery

Beiwak®


Winch 12000lb
FORGED
OUT
IN
ON
OFF
Power switch
WARNING!
Please turn off the power switch when not in use.

Beiwak®

12V 12000LBS ELECTRIC WINCH

POWERFUL MOTOR | DURABLE & RELIABLE | HIGH PERFORMANCE | WIDE APPLICATION



SPECIFICATIONS	
Rated Line Pull	12000 lbs / 5443 kg
Motor	12V DC, Permanent Magnet
Power	3900W / 5.2HP
Gear Train	3-Stage Planetary Gear
Gear Ratio	166:1
Clutch	Manual Sliding Ring Gear
Braking Action	Automatic in the Drum
Wire Rope	Φ10mm × 24m (3/8" × 78.7 ft)
Drum Size	Φ2.5" × 3.15" (Φ63mm × 80mm)
Mounting Bolt Pattern	10.00" × 4.50" (254mm × 114.3mm)
Overall Dimensions	15.98" × 5.91" × 6.89" (406 × 150 × 175 mm)
Net Weight	66.1 lbs / 30.0 kg


PERFORMANCE (FIRST LAYER)

Line Pull (lbs/kg)	Line Speed (ft/min)	Motor Current (A)
0	12.0	24
4000 / 1814	8.5	90
8000 / 3629	6.0	160
10000 / 4536	4.5	220
12000 / 5443	3.2	320

PACKAGE INCLUDES

- 1 × Electric Winch
- 1 × Handheld Wired Control
- 1 × Wireless Remote Control
- 1 × Hook
- 1 × Roller Fairlead
- 1 × Mounting Bracket
- 1 × Mounting Hardware Set
- 1 × User Manual

DIMENSIONS

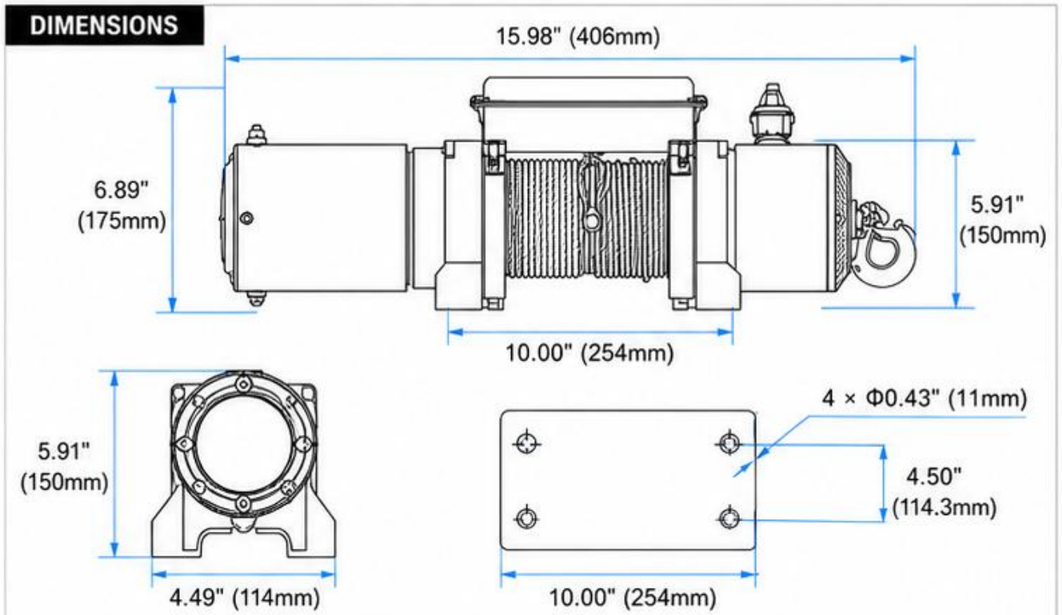

POWERFUL MOTOR
3900W High Power
Strong Pulling Force

DURABLE CONSTRUCTION
All-metal Gear Train
Built to Last

AUTOMATIC BRAKE
Safe and Reliable
Stronger Control

WIDE APPLICATION
ATV, UTV, Trailer, Boat,
Off-road Recovery

Beiwak®



Beiwak®

12V 20000LBS ELECTRIC WINCH

POWERFUL PERFORMANCE | STRONG & RELIABLE | DURABLE CONSTRUCTION | WIDE APPLICATION



SPECIFICATIONS	
Rated Line Pull	20000 lbs / 9072 kg
Motor	12V DC, Permanent Magnet
Power	4500W / 6.0HP
Gear Train	3-Stage Planetary Gear
Gear Ratio	166:1
Clutch	Manual Sliding Ring Gear
Braking Action	Automatic in the Drum
Wire Rope	Φ11mm × 24m (7/16" × 78.7 ft)
Drum Size	Φ2.5" × 3.15" (Φ63mm × 80mm)
Mounting Bolt Pattern	10.00" × 4.50" (254mm × 114.3mm)
Overall Dimensions	18.90" × 5.91" × 6.89" (480 × 150 × 175 mm)
Net Weight	77.2 lbs / 35.0 kg


PERFORMANCE (FIRST LAYER)		
Line Pull (lbs/kg)	Line Speed (ft/min)	Motor Current (A)
0	11.0	26
6000 / 2721	7.2	80
12000 / 5443	5.2	150
16000 / 7257	4.0	210
20000 / 9072	3.2	320

PACKAGE INCLUDES

- 1 × Electric Winch
- 1 × Handheld Wired Control
- 1 × Wireless Remote Control
- 1 × Hook
- 1 × Roller Fairlead
- 1 × Mounting Bracket
- 1 × Mounting Hardware Set
- 1 × User Manual



DIMENSIONS

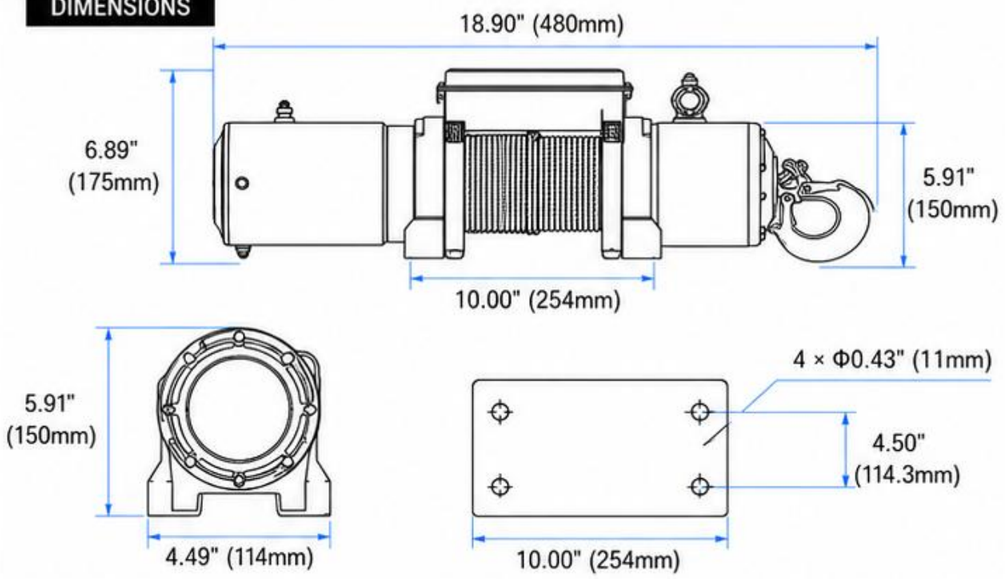

HIGH POWER MOTOR
4500W High Power
Strong Pulling Force

3-STAGE GEAR TRAIN
High Efficiency
Low Noise

AUTOMATIC BRAKE
Safe and Reliable
Stronger Control

WIDE APPLICATION
ATV, UTV, Trailer, Boat,
Off-road Recovery

Beiwak®


parameter

Model	2000lb	3000lb	3500lb	4000lb	4500lb	6000lb	9500lb	12000lb
Output Voltage	12v/24v	12v/24v	12v/24v	12v/24v	12v/24v	12v/24v	12v/24v	12v/24v
Horizontal Pull	400kg	1350kg	1575kg	1800kg	2025kg	2700kg	4275kg	5400kg
Vertical Lifting Capacity	200kg	300kg	350kg	400kg	450kg	600kg	800kg	1000kg
Control Method	Manual	Manual	Manual	Manual/Wireless	Manual/Wireless	Manual/Wireless	Manual/Wireless	Manual/Wireless
No-load Speed	6m/min	6m/min	6m/min	6m/min	6m/min	6m/min	6m/min	6m/min
Steel Cable	4mm*6m	5mm*8m	5mm*8m	5mm*8m	6mm*15m	8mm*15m	10mm*20m	10mm*24m
Motor Material	Copper Motor	Copper Motor	Copper Motor	Copper Motor	Copper Motor	Copper Motor	Copper Motor	Copper Motor
Product Gross Weight	6kg	7kg	8kg	10kg	15kg	28kg	35kg	38kg
Overall Dimensions (mm)	286*100*105	300*110*110	300*110*110	300*110*110	350*115*120	422*160*122	534*160*225	534*160*225

Beiwak®

XI'AN LIZHIXING
LIFTING EQUIPMENT CO., LTD.

SAFE LIFTING • RELIABLE QUALITY • SERVING THE WORLD

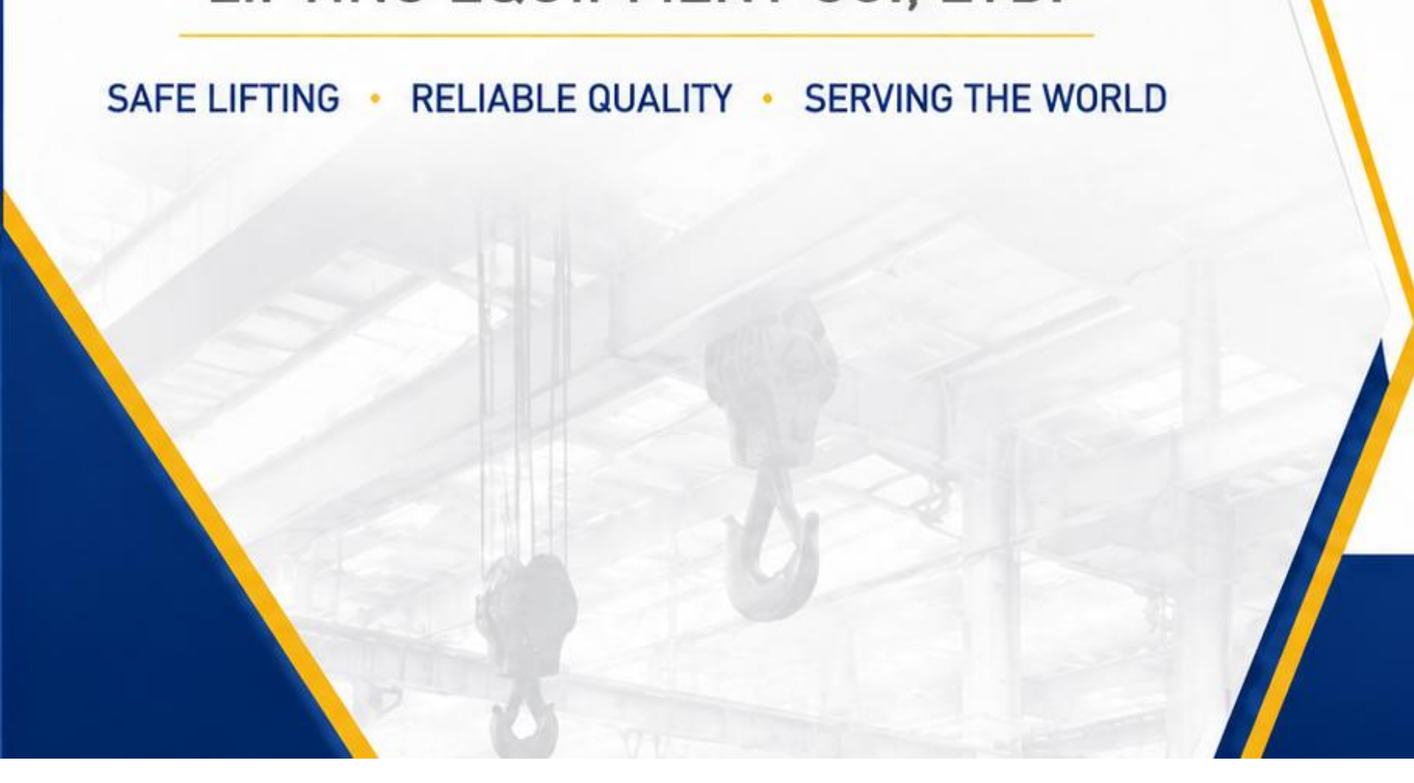

Ethan Ge

General Manager

Mobile: +86 18049220803

WhatsApp: +86 18049220803

E-mail: ysdh2026@hotmail.com

Block B, Building 5, Street 10, Zone E2,
Hardware & Electromechanical Area,
South China City, International Port District,
Xi'an City, Shaanxi Province, China

WeChat

WhatsApp